




Value pack solid carbide milling cutter, 5 pieces

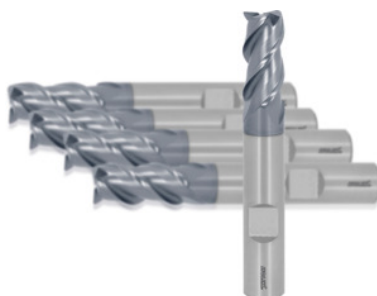

Order data

Order number	GG1296 5,75
GTIN	4045197907899
Item class	GGN

Description

Version:

Dimensions similar to **DIN 6527**.

Improved coating for general-purpose applications in steel and cast iron.

Same as No. 202296.

Technical description

Feed f_z for slot milling in steel $< 750 \text{ N/mm}^2$	0.03 mm
Feed f_z for side milling in steel $< 750 \text{ N/mm}^2$	0.04 mm
Corner chamfer width at 45°	0.2 mm
No. of teeth Z	3
Tolerance nominal $\varnothing$	e8
Shank	DIN 6535 HB to h6
Cutting edge $\varnothing D_c$	5.75 mm
Direction of infeed	horizontal, oblique and vertical
Overall length L	57 mm

Data sheet

Shank form	HB
Shank Ø D _s	6 mm
Flute length L _c	13 mm
Helix angle	45 degrees
Corner chamfer angle	45 degrees
Contents	5
Coating	AlCrN
Tool material	Solid carbide
Standard	DIN 6527
Type	N
Cutting width a _e for milling operation	0.3×D for side milling
Cutting width a _e for milling operation	Full slot cutting depth 1×D
Type of product	End / face mill

User data

	Suitability	V _c	ISO code
Aluminium (short chipping)	suitable only under restricted conditions	200 m/min	N
Alu > 10% Si	suitable only under restricted conditions	160 m/min	N
Steel < 500 N/mm ²	suitable	100 m/min	P
Steel < 750 N/mm ²	suitable	80 m/min	P
Steel < 900 N/mm ²	suitable	70 m/min	P
Steel < 1100 N/mm ²	suitable	50 m/min	P
INOX < 900 N/mm ²	suitable	60 m/min	M
INOX > 900 N/mm ²	suitable only under restricted conditions	40 m/min	M
GG(G)	suitable	75 m/min	K
Uni	suitable only under restricted conditions		

wet maximum	suitable
wet minimum	suitable
dry	suitable only under restricted conditions
Air	suitable

Suitable products

<https://www.hoffmann-group.com/GB/en/hom/p/GG1296-5,75>